

## ENERGY SEAL

### Log Home Sealant for Milled and Scribed Log Homes

Since it was introduced, Energy Seal has become one of the most popular members of our sealants. Energy Seal, was created specifically to seal milled or scribed log homes. One application makes any log wall completely weather-tight.




Energy Seal has excellent adhesion and stretch. It is long-lasting, UV-stable and chemical-resistant.

Unlike commonly used sealants, which look shiny and artificial, Energy Seal is textured to match the visual characteristics of wood. It easily tools to a smooth, professional finish, virtually disappearing into the walls after it's applied. It softens the lines on log walls and accepts the color of wood finishes. In fact, Energy Seal so closely matches your walls, most people can't tell the seams are sealed.

Application can be done by the homeowner or a professional contractor. We stock a full line of application accessories or can refer a professional applicator in your area.

### Energy Seal Colors

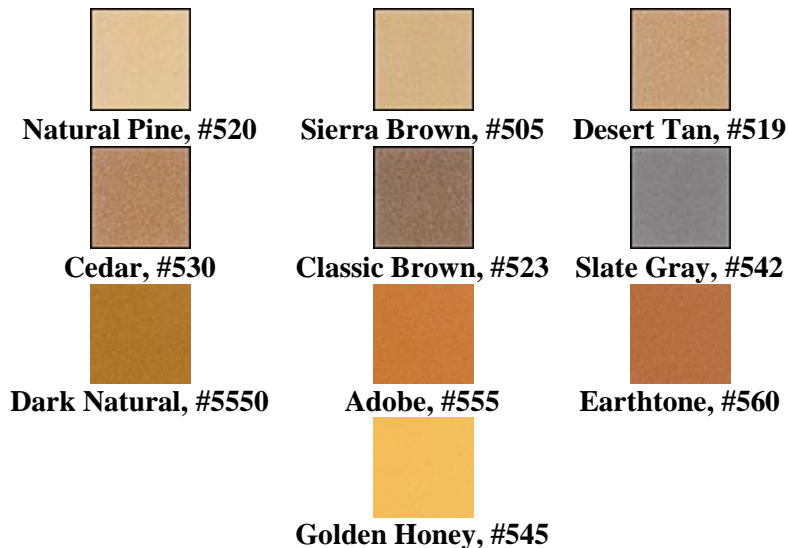

### Features and Statistics

- **Eliminates air and water infiltration**

- For interior and exterior walls
- Stretches and stays flexible
- Won't crack or peel
- Lightly textured appearance
- Suitable for all climates

Shelf Life	<ul style="list-style-type: none"> <li>• 1 year</li> </ul>
Application Temperature	<ul style="list-style-type: none"> <li>• 40° to 90°</li> </ul>
Application Methods	<ul style="list-style-type: none"> <li>• <a href="#">Chink Pump</a></li> <li>• Caulking Gun (Air, Bulk, Loading, Standard, Commercial) <i>see</i> <a href="#">Tools</a></li> <li>• Application Bag</li> </ul>
Surface Preparation	<ul style="list-style-type: none"> <li>• Clean and Dry</li> <li>• Backing material</li> <li>• Bond breaker tape on bare wood</li> </ul>
Frequency	<ul style="list-style-type: none"> <li>• As required</li> </ul>
Special Instructions	<ul style="list-style-type: none"> <li>• Apply approximately 3/8" thickness</li> <li>• Avoid application in direct sunlight</li> <li>• See application guide</li> </ul>
Drying Time	<ul style="list-style-type: none"> <li>• Skins over in 1 to 2 hours</li> <li>• Cures in 2 to 8 weeks depending on temperature and humidity</li> </ul>

Energy Seal Size List
5 gal (50 lb) pail
30 oz. tubes (Case of 10) 30 lb.
11 oz. tubes (Case of 12) 12 lb.

